


Baseline product line

Ajax SpaceControl Jeweller

Wireless key fob for Ajax system control.



4 buttons

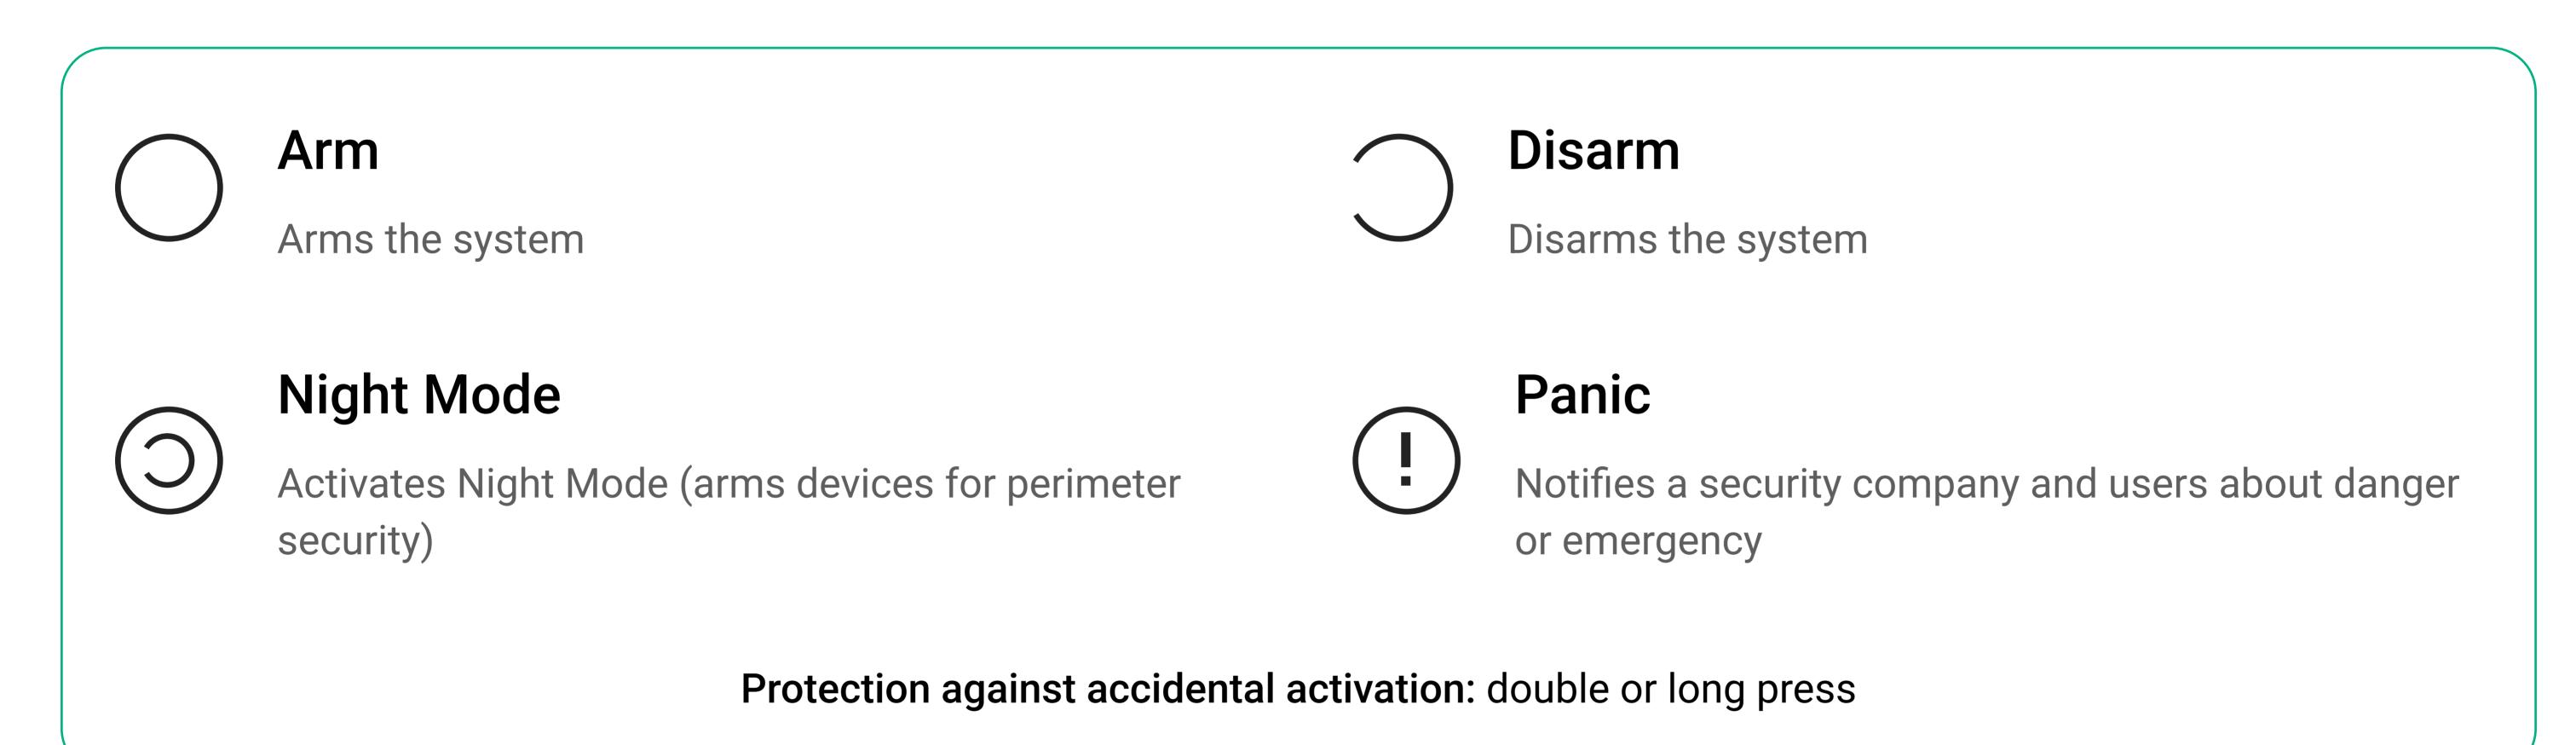

Jeweller communication technology

- Up to 1,300 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Indication of command execution by LED

Flawless autonomy

- Up to 5 years of operation
- Pre-installed replaceable battery
- Low battery warning

Quick setup

- Pairing with a hub via QR code
- Remote control and configuration in the app
- It can be carried around in a pocket or on the key ring

Compliance	Compatibility	Communication with control panel	Power supply
EN 50131 (Grade 2) PD 6662:2017 SIA CP-01 UL985, UL1023, UL2610 ULC S545, ULC S304	Hubs Hub (2G) Jeweller Hub (4G) Jeweller Hub Plus Jeweller Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G) Range extenders ReX, ReX 2	Jeweller communication technology Frequency bands 866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz 905.0-926.5 MHz 915.85-926.5 MHz 921.0-922.0 MHz Depends on the region of sales. Jeweller communication range up to 1,300 m In an open space.	Battery 1 × CR2032 Pre-installed. Battery life up to 5 years
Installation	Enclosure	Complete set	
Operating temperature range from -25°C to +50°C Operating humidity	Colour white black	Ajax SpaceControl Jeweller 1 × CR2032 battery (pre-installed) Quick start guide	
up to 95%	Dimensions 65 × 37 × 10 mm		
Protection class			
IP50	Weight		
	13 g		













For detailed information, scan the QR code or follow the link: